

ps ns

MULTI-WAVELENGTH, HIGH POWER, PULSED LASER MODULE

KATANA HP

AInnoTech
(주)에이이노텍
FiberAll
www.FIBERALL.co.kr
광통신 전문 소정품 파이버홀

www.AINNOTECH.com
Email: korea@ainnotech.com
TEL: 02, 409, 3222 FAX: 02, 409, 3229
서울시 송파구 가락동 10-9 현성 B/D 2F



+

SWISS MADE

-
**THE HIGH
POWER,
PICOSECOND
LASER IN
GREEN,
YELLOW,
ORANGE
RED AND
INFRARED**
-

Katana HP is a versatile, **sub-nanosecond** pulsed laser system designed for all industrial applications that require continuous tuning of the repetition rate, maintenance-free operation and low cost of ownership. The Katana laser can be triggered from **pulse-on-demand** up to **100 MHz** from either an internal or an external source (master or slave mode), and can provide pulses from 30 ps up to 10 ns in pulse duration. Katana HP has already proven to be an ideal, robust source as a depletion laser for super-resolution STED fluorescence microscopy, for which application it can also provide a complete solution when combined with the Katana single-box multi-wavelength excitation system.

OPTIONS:

- + UVA 355 nm
- + UVC 266 nm
- + Burst mode
- + Isolator /collimator output
- + More options on request

MAIN APPLICATIONS:

- + Depletion laser for STED microscopy
- + Fluorescence microscopy
- + Solar cell scribing and contacting
- + Spectroscopy
- + Laser ranging

OUTSTANDING FEATURES :

- + Infrared: 775, 1064, 1200 & 1550 nm
- + **Orange: 556 – 620 nm**
- + **Red: 620 – 660 nm**
- + **Green: 532 nm**
- + Pulse duration: 30 ps – 10 ns
- + Continuously tunable pulse repetition rate
- + Master/slave operation
- + External triggering
- + Pulse-on-demand
- + Maintenance free – no alignment required
- + 24/ 7 operation




	KATANA - 15 HP	KATANA - 12 HP	KATANA - 10 HP	KATANA - 08 HP	KATANA - 06 HP	KATANA - 05 HP
CENTER WAVELENGTH	1550 nm	1112 – 1320 nm	1030 – 1064 nm	775 nm	556 – 660 nm	512 – 532 nm
PULSE DURATION ¹	< 30 ps – 10 ns	< 200 ps – 10 ns	< 30 ps – 10 ns	< 30 ps – 10 ns	< 200 ps – 10 ns	< 30 ps – 10 ns
AVG. OUTPUT POWER [UP TO] ¹	14 W	2 W	20 W	8 W	1 W	5 W
PULSE ENERGY [UP TO] ¹	3 μJ	100 nJ	10 μJ	1 μJ	50 nJ	5 μJ
PEAK POWER [UP TO] ¹	100 kW	8 kW	400 kW	50 kW	2 kW	200 kW
PULSE REPETITION RATE ¹	pulse-on-demand – 100 MHz					
SPECTRAL BANDWIDTH	> 0.1 nm					
BEAM QUALITY	$M^2 < 1.3$, TEM ₀₀					
PER	> 23 dB					
AMPLITUDE NOISE	< 4.0 % rms (10 h)					
LASER OUTPUT	Collimated free-space					
ENVIRONMENTAL						
WARM-UP TIME	< 15 minutes					
OPERATION TEMPERATURE	15 °C – 35 °C					
STORAGE TEMPERATURE	- 20 °C – 65 °C					
ON/OFF CYCLES	> 10000					
MECHANICAL						
SIZE LASER HEAD	39 x 100 x 162 mm ³					
WEIGHT LASER HEAD	1 kg					
SIZE CONTROL UNIT	133 x 483 x 400 mm ³ (19"/3U rack mount)					
WEIGHT CONTROL UNIT	7 kg					
ELECTRICAL						
POWER SUPPLY	24 VDC/9A or 90 – 264 VAC, 47 – 63 Hz					
POWER CONSUMPTION	< 300 W					
COOLING						
LASER SYSTEM	air cooled					


¹ Please inquire for possible combinations of wavelength, pulse duration, pulse energy and repetition rate




PULSE PROFILE

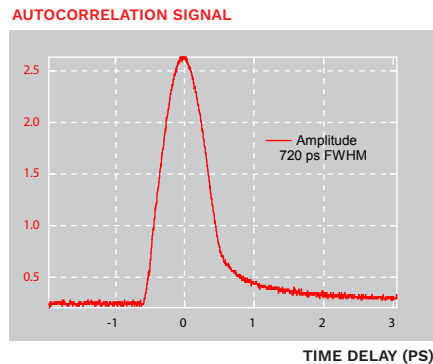


OUTPUT POWER VS REPETITION RATE

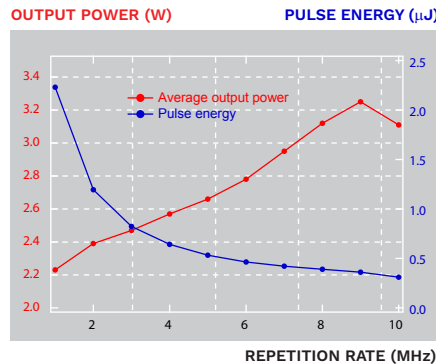

BEAM QUALITY

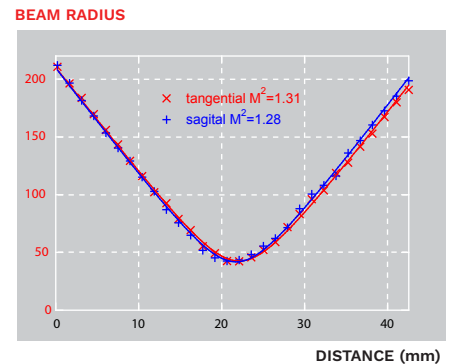

APPLICATION

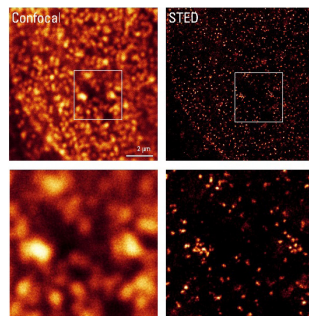

Resolution enhancement achieved with Leica TCS SP8 STED 3X microscope and the 775 nm Katana-08 HP pulsed laser, compared to the resolution achieved with confocal microscopy. Courtesy of Leica Microsystems